
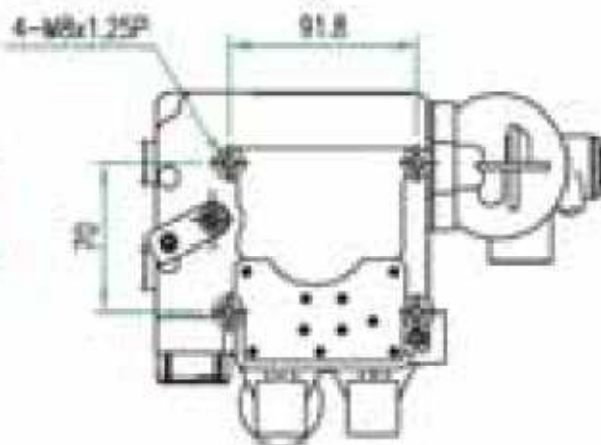
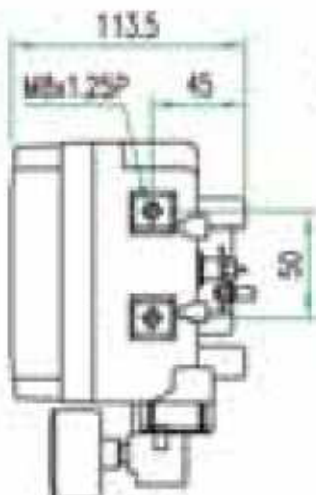


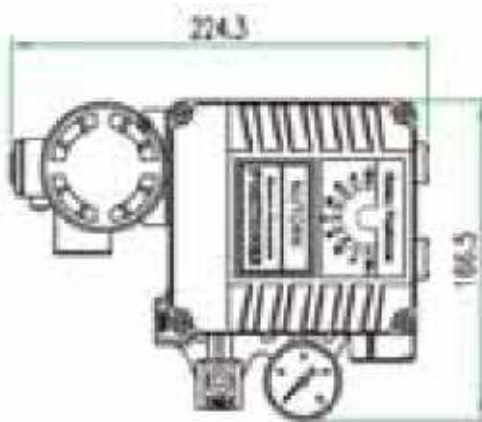

Specification:

Item	Type	Single Acting	Double Acting
Input Signal:		4-20mA DC	
Impedance:		250±15 Ohm	
Supply Pressure:		1.4~7kg.f/cm ² (20~100psi)	
Stroke:		0 - 90°	
Air Conn.:		1/4"PT(NPT)	
Gauge Conn.:		1/8"PT(NPT)	
Electric Conn.:		1/2"PT(NPT,PF)	
Explosion Proof		ExdIIBT6	
		ExdIICT6	
		ExiaIICT6	
Protection:		IP66	
Amb. Temp.:		-20 ~ 60℃ (-4 ~ 158°F)	
Linearity:		± 1% F.S.	± 2% F.S.
Hysteresis:		± 1% F.S.	
Sensitivity:		± 0.2% F.S.	± 0.5% F.S.
Repeatability:		± 0.5% F.S.	
Air Consumption:		3 LPM(Sup=1.4kg.f/cm ² , 20psi)	
Flow Capacity:		80 LPM(Sup=1.4kg.f/cm ² , 20psi)	
Material:		Aluminum, Die-Casting	
Weight:		2.8kg(6.2lb)	