




Reference models

3H/4H	2	10	- 08
3H:2/4 Three-hole two-gang	Series code 1: 100 series 2: 200 series 3: 300 series 4: 400 series	Position number 10: Single-head dual-position	Port size 06: 1/8 " 08: 1/4 " 10: 3/8 " 15: 1/2 "

Outline dimensions

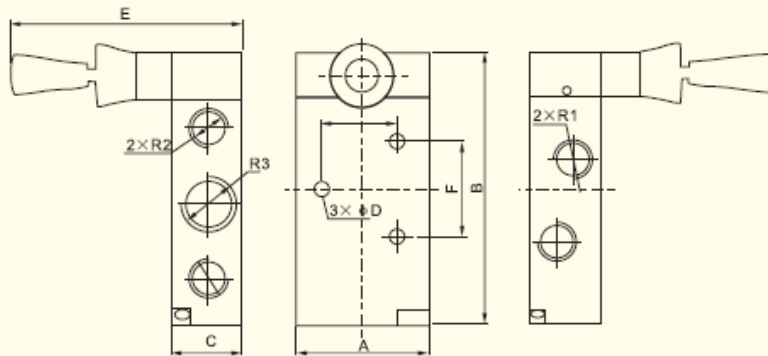

Model	ϕD	A	B	C	E	F	J	R1	R2	R3
4H110-06										
4H210-08	4	35	76.3	22	94.5	21	21	R1/4	R1/8	R1/4
4H310-10	4	40	92	27	100	28	28	R3/8	R1/4	R3/8
4H410-15	5.5	50	124	34	105	28.2	34.6	R1/2	R1/2	R1/2

Technical specifications

Model	3H210-08 4H310-08	3H310-10 4H310-10	3H410-15 4H410-15
Working fluid	Air		
Acting mode	Direct acting type		
Effective sectional cross area (mm ²)	16(CV=0.89)	25(CV=1.4)	30(CV=1.68)
Port size	1/4 "	3/8 "	1/2 "
Operating pressure	0~8.0kgf/cm ²		
Working temperature	5~60℃		
Lubrication oil	Not need		
Operating angle	±15		
Weight (kg)			
Material of main parts	Body	Aluminum alloy	
	Seal ring	NBR	